


CONTACT DETAIL

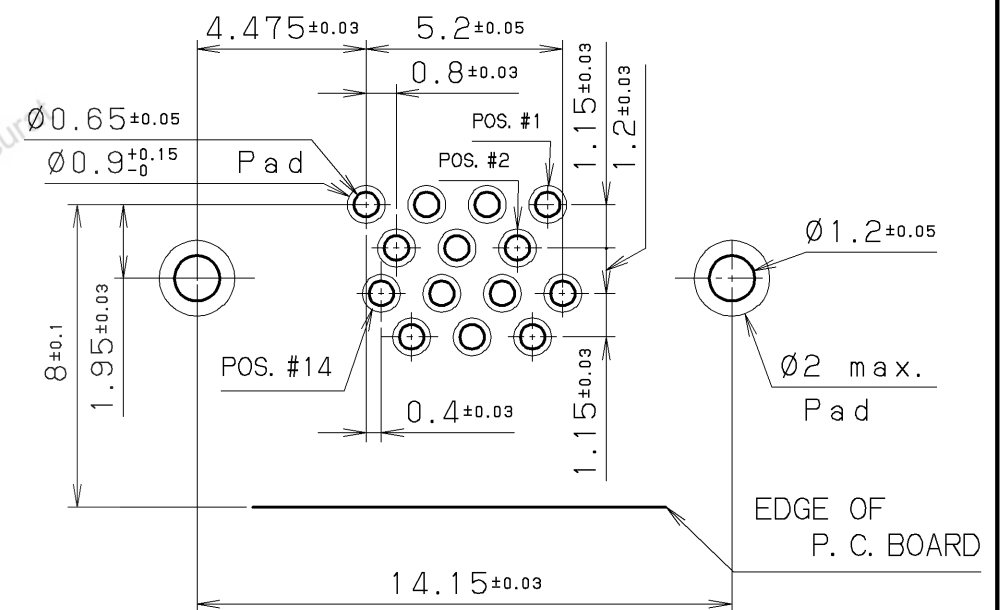

RECOMMENDED P. C. B. LAYOUT
(MOUNT SIDE VIEW)
(t=1.6 SCALE=5/1)

NOTE

1. CONTACT PLATING
MATING AREA: 0.76 MICRO METERS MINIMUM GOLD PLATING
TERMINATION AREA: 0.05 MICRO METERS MINIMUM GOLD PLATING
UNDERPLATING: NICKEL PLATING
2. MATING CONNECTOR
HDR-E14MAG1+
3. SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)

HTTK

The product information in this data is for reference only.
This is subject to change without notice.
Contact our sales staff for further information before considering or ordering any of our products.
Please request Engineering Drawing for the most current and accurate design information.

| | | | | | |
|---|----------------|-----------------|----|----------------|---------------|
| 6 | LOCK SCREW | STEEL | 2 | NICKEL PLATING | — |
| 5 | BOARD LOCK PIN | PHOSPHOR BRONZE | 2 | NICKEL PLATING | — |
| 4 | BRACKET | PPS (GF) | 1 | — | UL94V-0 BLACK |
| 3 | FEMALE CONTACT | PHOSPHOR BRONZE | 14 | NOTE. #1 | — |
| 2 | INSULATOR | PA9T (GF) | 1 | — | UL94V-0 BLACK |
| 1 | SHELL | STEEL | 1 | NICKEL PLATING | — |

| LTR. | DATE | BY | REV. | DESCRIPT | No. | PART NAME | MATERIAL | QTY | FINISH | NOTE |
|-----------------------------------|----------------|------|--------|----------|-----|-----------|-----------|----------------------------------------------|--------|------|
| △ | | | | | | | | | | |
| △ | | | | | | | | | | |
| △ | Jun-21 2012 | Y. K | Revise | | | | | | | |
| DATE | | | | | | SCALE | UNIT | 3RD. A. P | | |
| Jan.12.2006 | | | | | | 2 / 1 | mm (INCH) | HONDA TSUSHIN KOGYO CO., LTD. | | |
| APP. DATE&REV. | | | | | | NAME | | 0.8mm SPACING RIGHTANGLE FEMALE CONNECTOR | | |
| DR. DE. CHK. CHK. APP. | | | | | | PART NO. | | HDR-EC14LFDN-SLE+ | | |
| M. KASHARA M. KASHARA — — Y. KATO | | | | | | REV. | | 1A | | |