

NOTE

1.CONTACT PLATING

MATING AREA :0.76 MICRO METERS MINIMUM GOLD PLATING  
 TERMINATION AREA :0.05 MICRO METERS GOLD PLATING  
 UNDERPLATING :1.3 MICRO METERS MINIMUM NICKEL PLATING

2.MATING CONNECTOR


HDR-E26MAG ( ) +  
 HDR-E26MSG ( ) +

3.SPECIFICATION

RATED CURRENT 0.5A  
 RATED VOLTAGE 125V AC (r. m. s.)

4.TWO LOCK SCREWS ARE

SUPPLIED WITH A CONNECTOR.

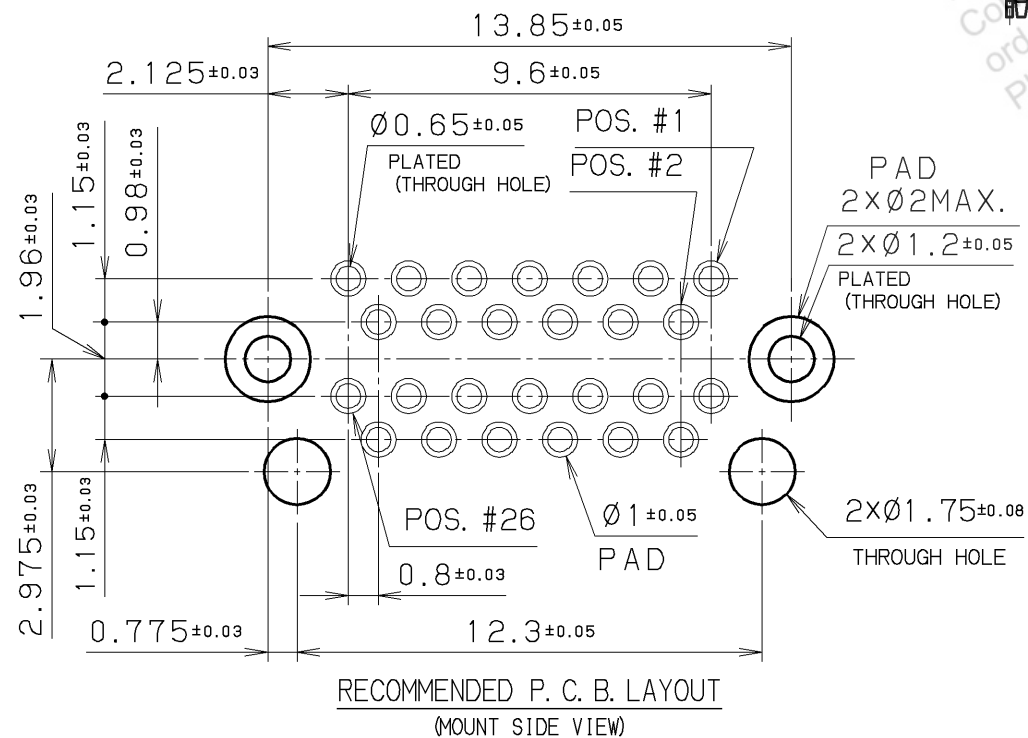

5	LOCK SCREW	STEEL	2	NICKEL PLATING	
4	BOARD LOCK PIN	PHOSPHOR BRONZE	2	TIN PLATING	
3	SHELL	STEEL	1	NICKEL PLATING	
2	CONTACT	PHOSPHOR BRONZE	26	SEE NOTE #1	
1	INSULATOR	PA9T	1		UL 94V-0 BLACK

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE		SCALE		UNIT	3RD. A. P	<b>HTK</b> HONDA TSUSHIN KOGYO CO., LTD.			
	May.20.2019		2 / 1		mm (INCH)		NAME 0.8mm SPACING FEMALE CONNECTOR (THROUGH HOLE TYPE)			
	APP. DATE&REV.						PART NO. HDR-EC26FDT3G2-SLE+ REV.			
	DR.	DE.	CHK.	CHK.	APP.					
	S. MURAKAMI	S. MURAKAMI	S. YOSHIDA		Y. KATO					