

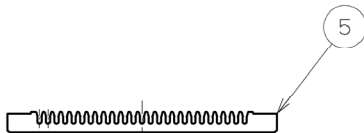


CONTACT DETAIL (5/1)



掲載している製品の特性及び仕様は参考値です。  
 特性及び仕様については、予告なく変更する場合があります。  
 採用のご検討やご注文の際は、担当窓口までお問い合わせのうえ、  
 納入仕様書の取り交わしをお願いします。

The product information in this data is for reference only.  
 This is subject to change without notice.  
 Contact our sales staff for further information before considering  
 ordering any of our products.  
 Please request Engineering Drawing for the most current and accurate  
 design information.

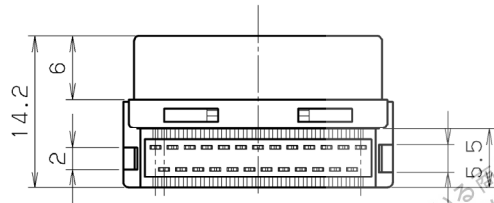

NOTE 1. CONTACT PLATING  
 GOLD 0.76 $\mu$ m MIN. ON MATING AREA,  
 GOLD 0.05 $\mu$ m ON TERMINATION AREA,  
 ALL OVER NICKEL 1 $\mu$ m MIN. UNDERPLATED.

2. APPLICABLE CONNECTOR AND COVER  
 HDR-E50MAG1+, HDR-E50MSG1+  
 HDR-E ( ) LP ( )

3. ASS'Y TOOLS  
 FHAT-0029: PROTRUDE WIRE CUT  
 FHPT-923B: IDC PRESS

4. SPECIFICATION  
 RATED CURRENT 0.5A  
 RATED VOLTAGE 125V AC (r. m. s.)

5. APPLICABLE WIRE SIZE  
 30AWG (7/0.1) INSULATION O. D  $\phi$ 0.58

				5	CABLE HOUSING	PBT	2		UL94V-0 SEE TABLE
				4	SPACER	PBT	2		UL94V-0 BLACK
				3	INSULATOR	PA9T	1		UL94V-0 BLACK
				2	SHELL	STEEL	1	NICKEL PLATING	—
				1	FEMALE CONTACT	PHOSPHOR BRONZE	50	NOTE#1	—

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE Aug-31 2015			SCALE 2/1		UNIT mm (INCH)	3RD. A. P	<b>HTK</b> HONDA TSUSHIN KOGYO CO., LTD. NAME 0.8mm SPACING SHIELDED BOARD TO CABLE FEMALE CONNECTOR (IDC) PART NO. HDR-E50FAG1+		
	APP. DATE&REV.									
	DR. S. MURAKAMI	DE. S. MURAKAMI	CHK. S. WATANABE	CHK. —	APP. Y. KATO					