


1. CONTACT PLATING
MATING AREA : 0.76 MICRO METERS MINIMUM GOLD PLATING
TERMINATION AREA : 0.05 MICRO METERS MINIMUM GOLD PLATING
UNDERPLATING: NICKEL PLATING
2. APPLICABLE HOOD
HDR-E () LP ()
3. MATING CONNECTOR
HDR-EA () LFY () G1+
HDR-EC () LFD () +
4. ASSEMBLY TOOLS
WIRE ARRANGING TOOL: FHAT 0029
IDC PRESS TOOL: FHPT 923B
5. SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)

PART NO.	APPLICABLE WIRE SIZE	SYMBOL	CABLE HOUSING COLOR
HDR-E () MG1+	28AWG (7/0.127) INSULATION O. D Ø0.58	MG1:50 POS. G1:14, 26 POS.	BLACK
HDR-E () MAG1+	30AWG (7/0.1) INSULATION O. D Ø0.58	MAG1:50 POS. AG1:14, 26 POS.	BLACK
HDR-E () MBG1+	32AWG (7/0.08) INSULATION O. D Ø0.44	MBG1:50 POS. BG1:14, 26 POS.	GLAY
HDR-E () MBAG1+	32AWG (7/0.08) INSULATION O. D Ø0.58	MBG1:50 POS. BG1:14, 26 POS.	BLACK

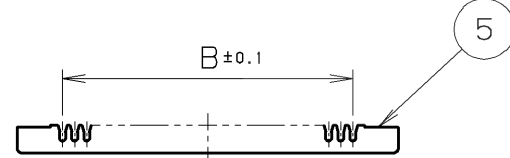

PART NO.	n NO. OF POS.	A	B	C
HDR-E50M () G1+	50	25.2	0.8x24=19.2	23.4
HDR-E26M () G1+	26	15.6	0.8x12=9.6	13.8
HDR-E14M () G1+	14	10.8	0.8x6=4.8	9.0
DIMENSION				

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
△3					5	CABLE HOUSING	PBT	2	—	UL94V-0 SEE TABLE
△2					4	SPACER	PBT	2	—	UL94V-0 BLACK
△1	Jun.23 2005	Y. K	REVISED		3	INSULATOR	PBT	1	—	UL94V-0 BLACK
					2	SHELL	STEEL	1	NICKEL PLATING	—
					1	MALE CONTACT	PHOSPHOR BRONZE	n	NOTE#1	—

DATE	SCALE	UNIT	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.			
Mar.29.2004	2 / 1	mm (INCH)		DR.	DE.	CHK.	CHK.
APP. DATE&REV.				Y. KATO	Y. KATO	—	C. NUNOKAWA
				H. EBIHARA		NAME	
						0.8mm SPACING SHIELDED BOARD TO CABLE MALE CONNECTOR (IDC)	
						PART NO.	HDR-E () M () G1+
						REV.	1A