


RECOMMENDED P. C. B. LAYOUT t=1.6±0.1 (SCALE=5/1)  
MOUNT SIDE VIEW

NOTE #1.  
CONTACT PLATING  
CONTACT AREA: GOLD 0.1 μm MIN.  
OVER PALLADIUM/NICKEL 0.5 μm  
TERMINAL AREA: GOLD 0.05 μm  
ALL OVER NICKEL UNDERPLATED.

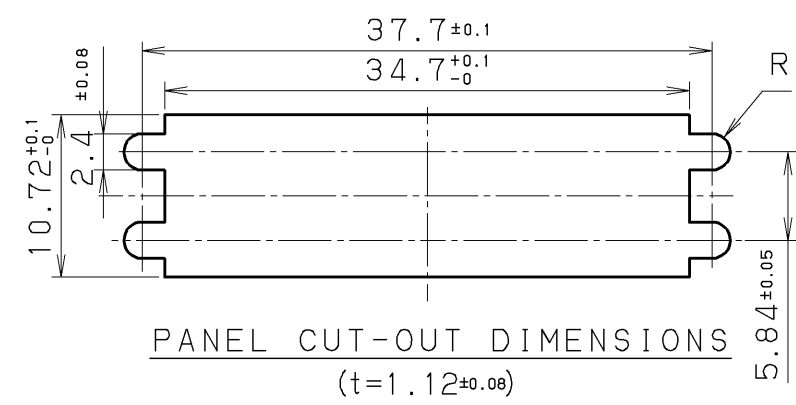

7	SPACER	STEEL	1		
6	BOARD LOCK	PHOSPHOR BRONZE	2	NICKEL PLATING	
5	SQR. NUT	BRASS	4	NICKEL PLATING	M2×0.4
4	SHELL	STEEL	2	NICKEL PLATING	
3	INSULATOR	PPS	1		UL94V-0 BLACK
2	CONTACT	PHOSPHOR BRONZE	136	SEE NOTE #1	
1	BRACKET	PPS	1		UL94V-0 BLACK

△										
△										
△	Mar. 16 2021	S. M	Add DATE CODE							
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE		SCALE		UNIT	3RD. A. P	<b>HTK</b> HONDA TSUSHIN KOGYO CO., LTD.			
	Sep. -27.2017		2 / 1		mm (INCH)		NAME 0.8mm SPACING 68POS. R/A DUAL STACKING FEMALE CONNECTOR			
	APP. DATE&REV.						PART NO. HDRA-E68W1LFDT1EA+ REV. 1A			
	DR.	DE.	CHK.	CHK.	APP.					
	S. MURAKAMI	S. MURAKAMI	S. YOSHIDA		K. OOKU					