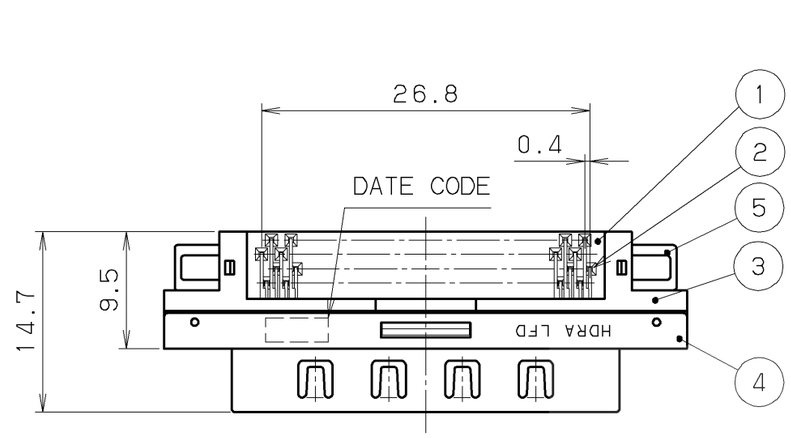



DETAIL A

(SCALE=5/1)

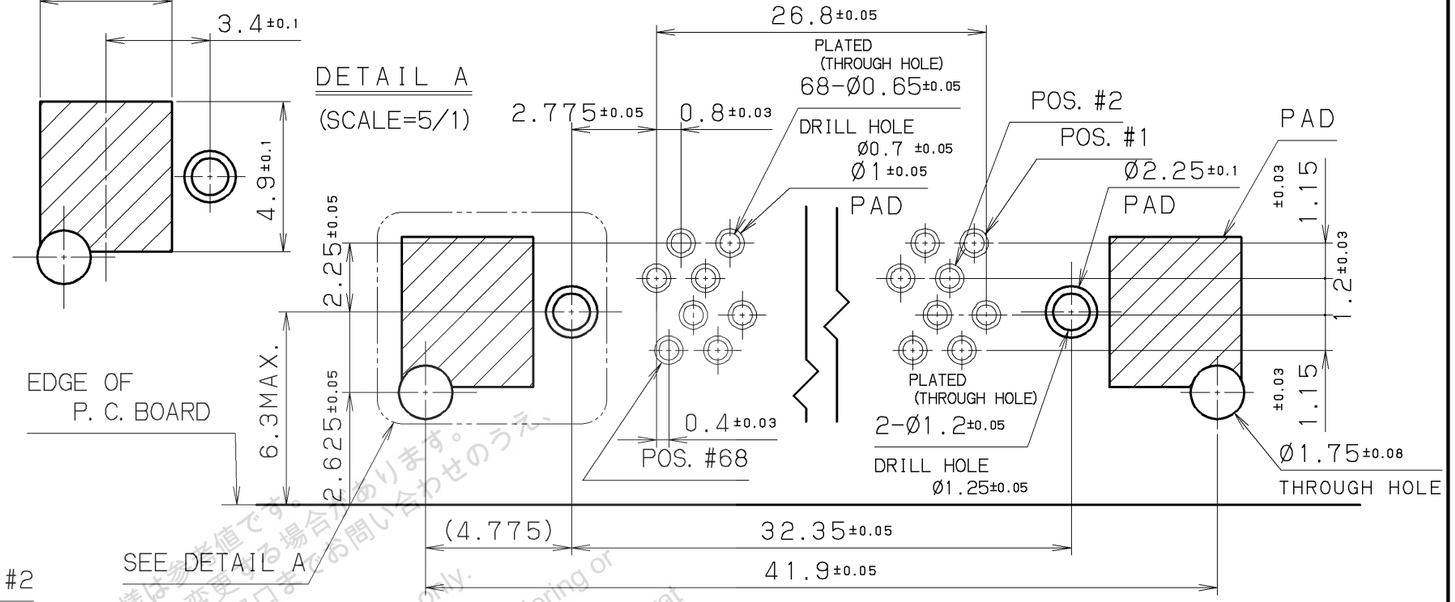

RECOMMENDED P. C. B. LAYOUT

(MOUNT SIDE VIEW)

(SCALE=5/1)

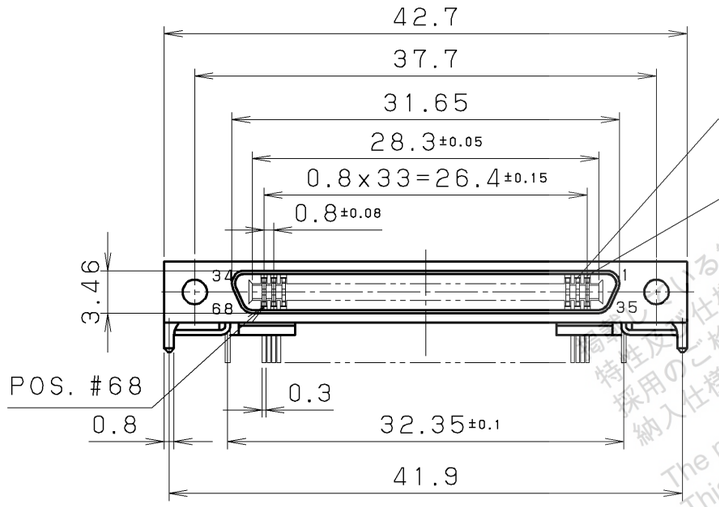

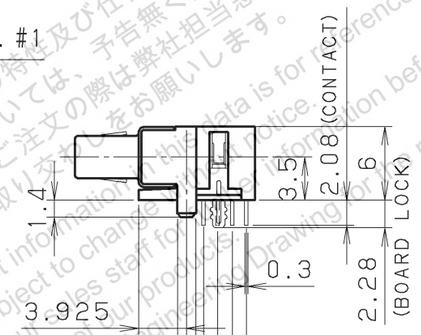

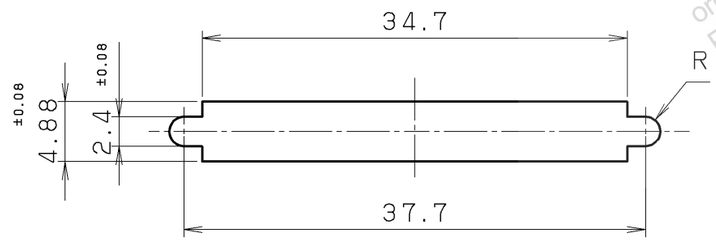

RECOMMENDED
PANEL CUT-OUT DIMENSIONS

(t=1.12±0.08)

NOTE 1.CONTACT PLATING
CONTACT AREA:GOLD 0.1 μm MIN. OVER PALLADIUM/NICKEL 0.5μm
TERMINAL AREA:GOLD 0.05 μm
ALL OVER NICKEL UNDERPLATED.

No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
5	HOLD DOWN	PHOSPHOR BRONZE	2	NICKEL	———
4	SHELL	STEEL	1	NICKEL	———
3	INSULATOR	PA9T	1	———	UL94V-0 BLACK
2	CONTACT	PHOSPHOR BRONZE	68	SEE NOTE 1	———
1	BRACKET	PPS	1	———	UL94V-0 BLACK

LTR.	DATE	BY	REV. DESCRIPT
3			
2			
1			

DATE	SCALE	UNIT	
Jun.10.2004	2 / 1	mm (INCH)	3RD. A. P
APP. DATE&REV.			

DR.	DE.	CHK.	CHK.	APP.
Y.KATO	Y.KATO	—	C.NUNOKAWA	H.EBIHARA

HONDA TSUSHIN KOGYO CO., LTD.

NAME	0.8mm SPACING 68POS. R/A FEMALE CONNECTOR (ONE MOLD TYPE)
PART NO.	HDRA-EC68LFDT2+ REV.

ID= HDRA-EC68LFDT2+ E0

The product information in this data is for reference only.
This is subject to change without notice.
Contact our sales staff for information before considering or ordering any of our products.
Please request Engineering Drawing for the most current and accurate design information.
HTK