

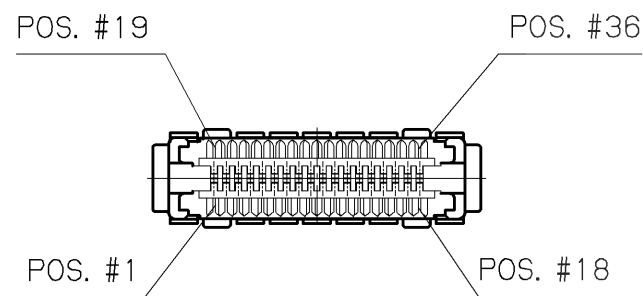


CONTACT DETAIL

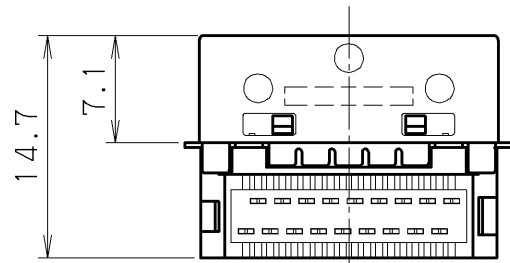

NOTE 1. CONTACT PLATING

CONTACT AREA: GOLD 0.1 μm MIN. OVER PALLADIUM/NICKEL 0.5 μm
 TERMINAL AREA: GOLD 0.05 μm
 ALL OVER NICKEL UNDERPLATED

2. APPLICABLE CABLE COVER P/N: HDRA-E36LPT ()

3. MATING CONNECTOR P/N: HDRA-EA36LFDT+

4. APPLICABLE CABLE WIRE SIZE: AWG#30 (7/0.1) AWG#28 (7/0.127),
 Ø0.58 (INSULATION O. D.)

PART NO.	APPLICABLE WIRE SIZE
HDRA-E36MA+	30AWG (7/0.1) INSULATION O. D Ø0.58
* HDRA-E36M+	28AWG (7/0.127) INSULATION O. D Ø0.58

*: THERE CONFIGURATIONS ARE IN THE PLANING STAGE

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
					5	CABLE COVER	PBT (GF)	2		UL94V-0 BLACK
					4	SPACER	PBT (GF)	2		UL94V-0 BLACK
					3	SHELL	STEEL	1	NICKEL	
					2	INSULATOR	PBT (GF)	1		UL94V-0 BLACK
					1	CONTACT	PHOSPHOR BRONZE	36	SEE NOTE 1	
DATE						SCALE		UNIT		3RD. A. P
Mar. 29. 2004						2 / 1		mm (INCH)		
APP. DATE & REV.						HONDA TSUSHIN KOGYO CO., LTD.				
DR.	DE.	CHK.	CHK.	APP.	NAME		0.8mm SPACING 36POS. CABLE IDC MALE CONNECTOR			
Y. KATO	Y. KATO	—	C. NUNOKAWA	H. EBIHARA	PART NO.		HDRA-E36M () +			
										REV.