

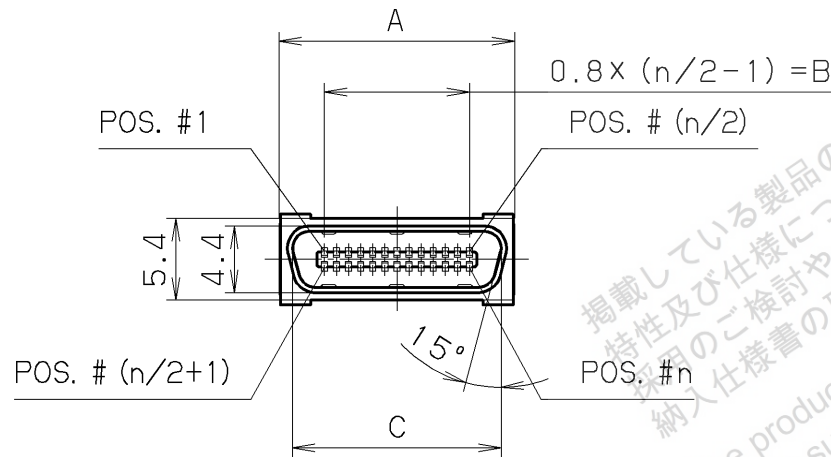
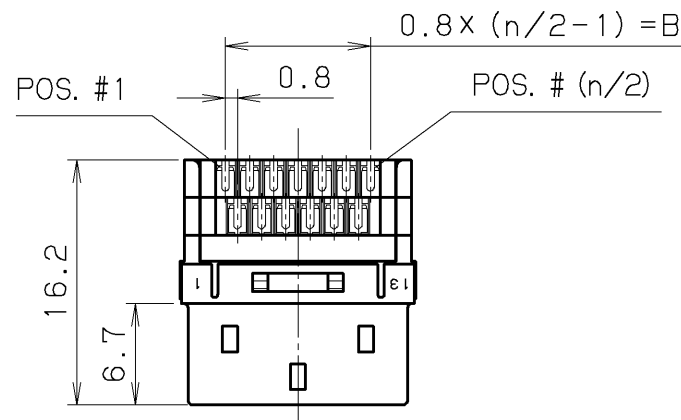


26	15.6	9.6	13.8	HDRP-E26MSG1+
n (No. of pos.)	A	B	C	Part No
Dimensions				

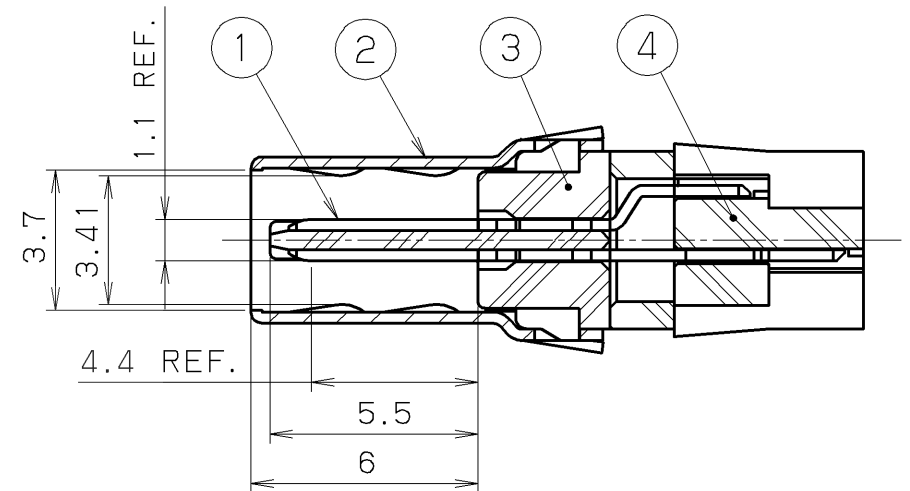

DATE CODE
INDICATION

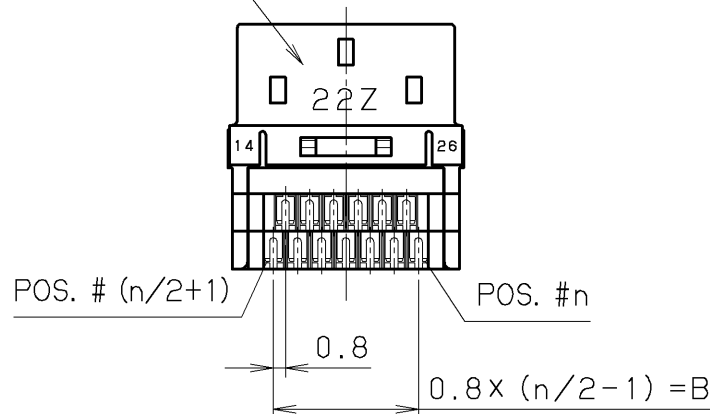

CONTACT DETAIL
(S=5/1)

NOTE.1.SPECIFICATION

RATED CURRENT 1.2A
RATED VOLTAGE 125V AC (r. m. s.)

2.CONTACT PLATING

MATING AREA :GOLD PLATING
TERMINATION AREA:TIN PLATING
UNDERPLATING :NICKEL PLATING

3.MATING CONNECTOR

HDRP-EC26LFDTG2- () +

4.APPLICABLE HOOD

HDR-E26LPHP+
HDR-E26LPJP+

5.USAGE PRECAUTION

IF THE OTHER THAN MATED CONNECTOR (NOTE.3) THE PERFORMANCE (RATED CURRENT) CANNOT BE GURANTEED.
PLEASE BE SURE TO USE (NOTE3.) AS IT MAY CAUSE TO FAILUER.
AWG#28 CABLE IS RECOMMENED, BUT PLEASE CHECK THE ACTUAL ALLOWABLE CURRENT OF THE CABLE WHEN YOU DESIGN AND/OR USE.

6.APPEARANCE

BLACK SPOTS MAY BE SEEN ON THE RESIN PART (INSULATOR) OF THE CONNECTOR, BUT THIS DOES NOT AFFECT PERFORMANCE.
THE HDR/HDRP SERIES CAN BE IDENTIFIED BY DIFFERENT COLOR OF THE RESIN PART (INSULATOR).

- HDR SERIES:BLAK
- HDRP SERIES:ORANGE

				4	SPACER	PA9T (GF)	1	——	UL94V-0 BLACK	
③				3	INSULATOR	PBT (GF)	1	——	UL94V-0 ORANGE	
②				2	SHELL	STEEL	1	NICKEL PLATING	——	
①				1	MALE CONTACT	COPPER ALLOY	26	NOTE#1	——	
LTR.	DATE	BY	REV.	DESCRPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE May.24.2022		SCALE 2 / 1		UNIT mm (INCH)		3RD. A. P	HTK HONDA TSUSHIN KOGYO CO., LTD.			
APP. DATE&REV.										
DR.		DE.		CHK.		CHK.		APP.		NAME 0.8mm SPACING SHIELDED MALE CABLE CONNECTOR
S. YOSHIDA		S. YOSHIDA		M. MATSUE		——		K. OOKAKU		PART NO. HDRP-E26MSG1+
										REV.