


TABLE 1

n	A	B
1	—	(2)
2	2	4
3	4	6
4	6	8
5	8	10
6	10	12
7	12	14
8	14	16
9	16	18
10	18	20
11	20	22
12	22	24
13	24	26
14	26	28
15	28	30
16	30	32

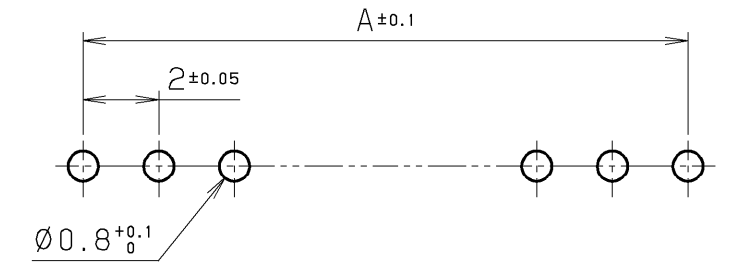

RECOMMENDED PCB LAYOUT

NOTE1. "n" SHOWS NUMBER OF CONTACTS.

2. AS FOR THE DIMENTION, SEE TABLE #1, #3.

3. THE CONNECTOR CUTS AN INSULATOR AT THE 'B' SIZE PART AND MAKES A CONNECTOR.

TABLE 3

PART NO.	C	D	E
LPC- (n) MA ( )	3±0.3	3±0.3	—
LPC- (n) TMA ( )	2.5±0.2	2.5±0.2	—
LPC- (n) T1MA ( )	4.4±0.2	(1.6)	—
LPC- (n) T2MA ( )	3.9±0.2	(2.1)	—
LPC- (n) T3MA ( )	7.5±0.2	(2.1)	—
LPC- (n) T4MA ( )	5.2±0.2	(2.5)	—
LPC- (n) T5MA ( )	5.4±0.2	(1.4)	—
LPC- (n) T6MA ( )	7.5±0.2	(0.2)	—
LPC- (n) T7MA ( )	7±0.2	(0.7)	—
LPC- (n) T8MA ( )	9.3±0.2	(0.3)	—
LPC- (n) T9MA ( )	4.5±0.2	4.1±0.3	—
LPC- (n) T10MA ( )	—	(2.8)	8.2±0.2
LPC- (n) T11MA ( )	7±0.2	(2.2)	—
LPC- (n) T12MA ( )	5.2±0.2	(2.0)	—
LPC- (n) T13MA ( )	4.5±0.3	3.2±0.3	—

TABLE 2

PART NO.	PLATING
LPC- (n) (T) MA	TIN/LEAD 2μm
LPC- (n) (T) MAG	GOLD 0.2μm

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
△					2	CONTACT	PHOSPHOR BRONZE	n	SEE TABLE #2	—
△					1	INSULATOR	PPS	1	—	UL94V-0 BROWN
DATE						SCALE	UNIT	3RD. A. P		
APR.05 (2005)						5/1	mm (INCH)			
APP. DATE&REV.						HTK HONDA TSUSHIN KOGYO CO., LTD.				
DR.	DE.	CHK.	CHK.	APP.	NAME MALE CONNECTOR					
T. ODA	T. ODA	—	C. NUNOKAWA	H. EBIHARA	PART NO. LPC- ( ) ( ) MA ( )					
										REV.