
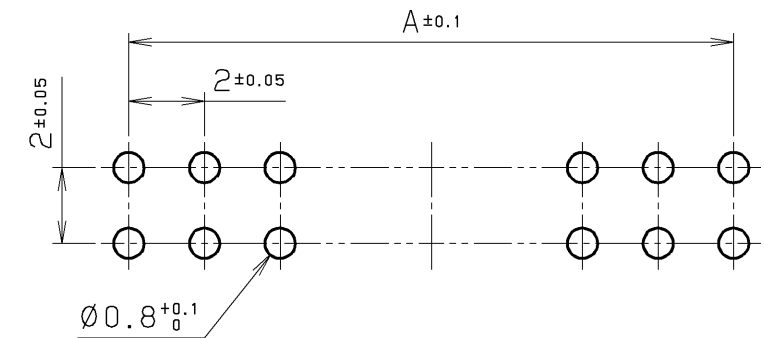
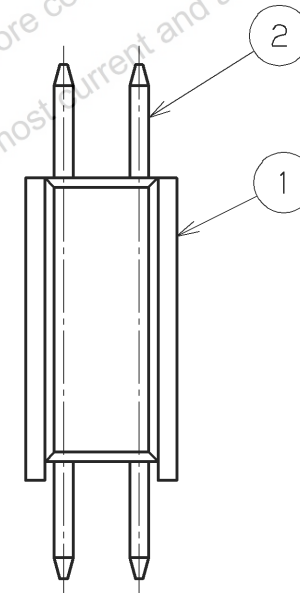
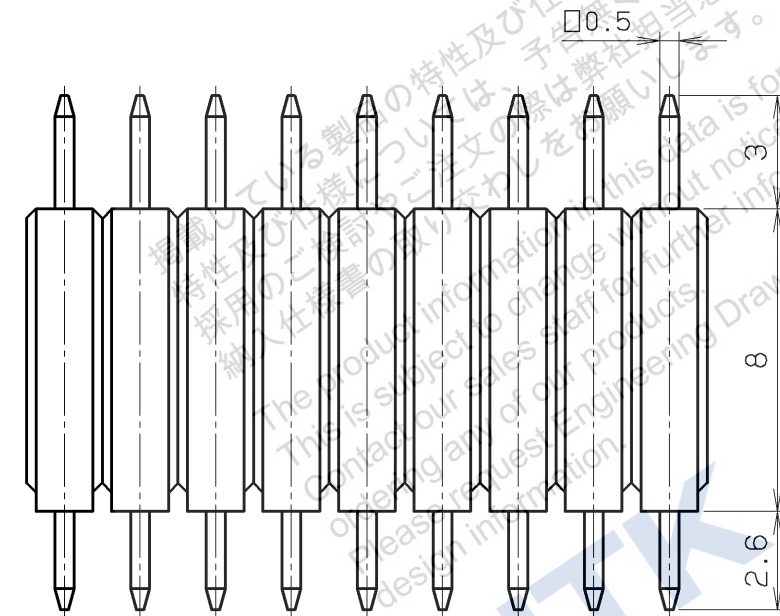


TABLE 1

n	A	B
2	—	(2)
4	2	4
6	4	6
8	6	8
10	8	10
12	10	12
14	12	14
16	14	16
18	16	18
20	18	20
22	20	22
24	22	24
26	24	26
28	26	28
30	28	30
32	30	32
34	32	34
36	34	36
38	36	38
40	38	40
42	40	42
44	42	44
46	44	46
48	46	48
50	48	50

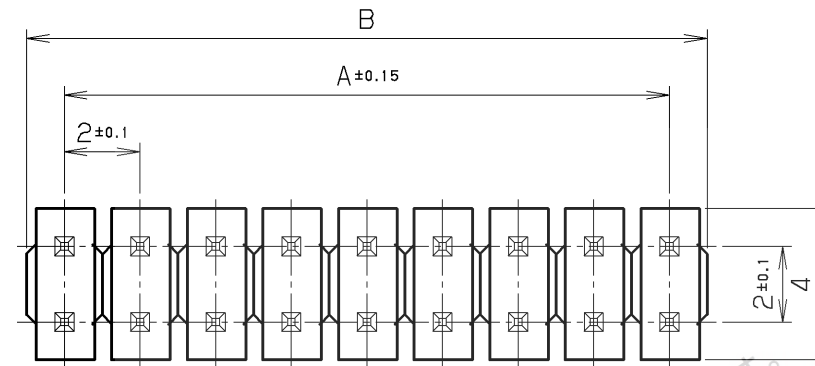

RECOMMENDED PCB LAYOUT  
PCB THICKNESS  $t=1.6$

TABLE 2

PART NO.	PLATING
LPC- (n) MH2	TIN/LEAD $2 \mu\text{m}$
LPC- (n) MH2G	GOLD $0.2 \mu\text{m}$

NOTE1. 'n' SHOWS NUMBER OF CONTACTS.

2. AS FOR THE DIMENTION, SEE TABLE #1.

3. THE CONNECTOR CUTS AN INSULATOR AT THE 'B' SIZE PART AND MAKES A CONNECTOR.

③									
②				2	CONTACT	PHOSPHOR BRONZE	n	SEE TABLE #2	—
①	APR.05.2005	T. O	REVISE	1	INSULATOR	PAG6	1	—	UL94V-0 BLACK
LTR.	DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE		SCALE		UNIT		3RD. A. P			
APR. 13 (1998)		5/1		mm (INCH)		HTK HONDA TSUSHIN KOGYO CO., LTD.			
APP. DATE&REV.					NAME MALE CONNECTOR				
DR.	DE.	CHK.	CHK.	APP.	PART NO. LPC- ( ) MH2 ( )				REV.
T. ODA	T. ODA	—	C. NUNOKAWA	H. EBIHARA					1 A