
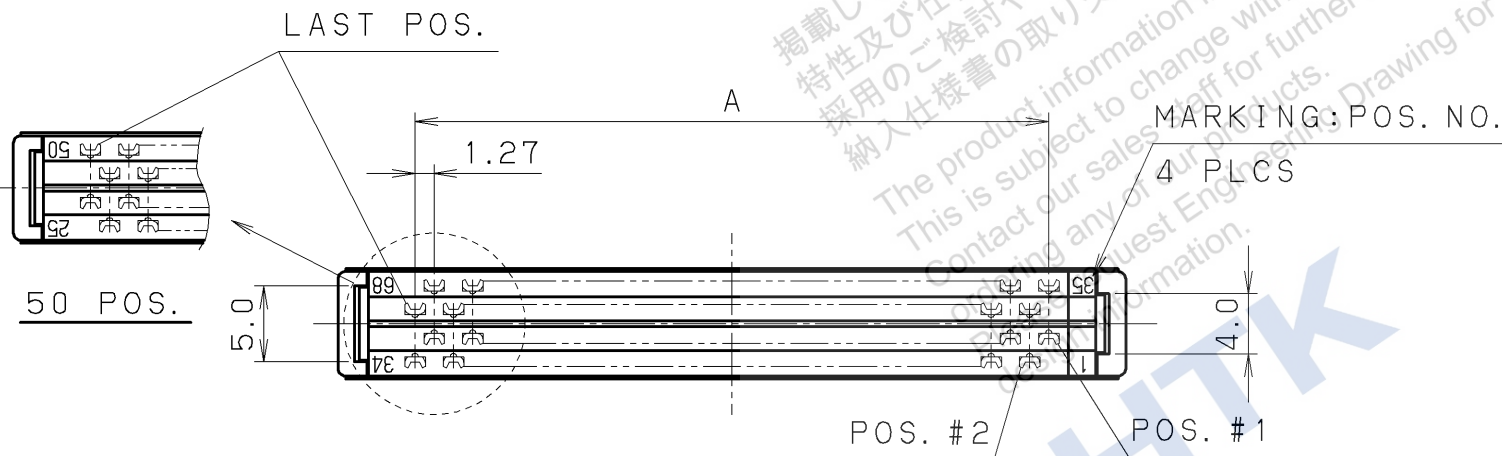
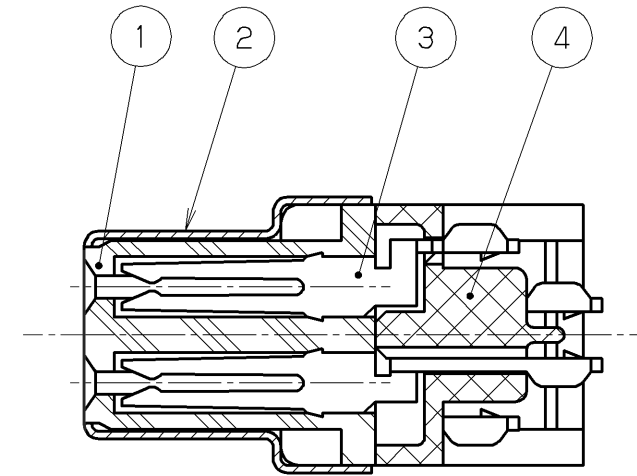


△ MARKING: HTK (REVERSE SIDE)
 DATE CODE (REVERSE SIDE)

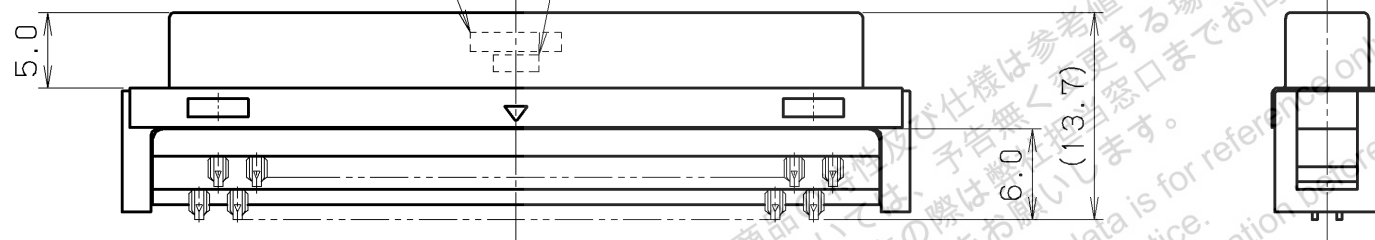

NOTE 1. CONTACT PLATING
 GOLD (0.2 μm MIN.) ON MATING AREA,
 GOLD (0.05 μm MIN.) ON TERMINATION AREA,
 ALL OVER NICKEL UNDERPLATED.

2. SUITABLE CABLE
 : AWG#20 MAX.

PCS-E68FS+	68	52.1	1.27x (34-1) =41.91	45.88	1, 34, 35, 68
PCS-E50FS+	50	40.7	1.27x (25-1) =30.48	34.45	1, 25, 26, 50
PCS-E36FS+	36	31.8	1.27x (18-1) =21.59	25.56	1, 18, 19, 36
PCS-E28FS+	28	26.7	1.27x (14-1) =16.51	20.48	1, 14, 15, 28
PCS-E20FS+	20	21.65	1.27x (10-1) =11.43	15.4	1, 10, 11, 20
PART NO.	NO. OF POS.	A	B	C	POS. NO.
DIMENSIONS					MARKING

4	SPACER	PBT (GF)	2	UL94V-0 BLACK							
3	CONTACT	PHOSPHOR BRONZE	NO. OF POS.	NOTE # 1							
2	SHELL	STEEL	1	Ni PLATING							
1	INSULATOR	PBT (GF)	1	UL94V-0 BLACK							
LTR.	DATE	BY	REV.	DESCRPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE	
DATE		SCALE		UNIT		3RD. A. P					
MAR. 31. 2004		2 / 1		mm (INCH)		HTK HONDA TSUSHIN KOGYO CO., LTD.					
APP. DATE & REV.		DR.		DE.		CHK.		CHK.		APP.	
		A. TASHIRO		A. TASHIRO		K. TASHIRO		S. WATANABE		Y. KATO	
NAME		PCS-E TYPE FEMALE CONNECTOR (RoHS)									
PART NO.		PCS-E () FS+								REV. 1A	