
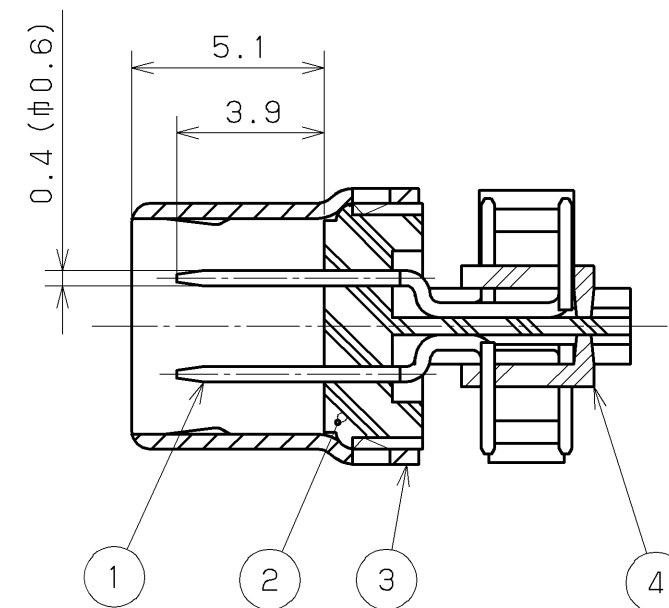


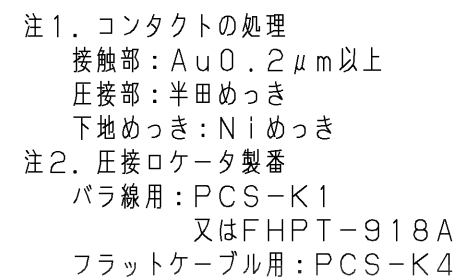

Technical drawing of the PCS-XE50MA connector, showing dimensions and labels:

- Top View:** Shows the overall dimensions: 13.2 (height), 5 (width of the top section), 1.27 (width of the bottom section), and B (total width). It includes a detail view of the "LAST POS." (Last Position) with dimensions 68, 100 (width) and 5 (height).
- Side View:** Shows the profile of the connector with labels POS. #1 and POS. #2.
- Bottom View:** Shows the bottom profile of the connector with a label 5.
- Labels:**
 - 製番 PCS-XE50MA (Part Number)
 - 芯数 (Number of Pins)
 - 適合ケーブル識別表示 (Cable Identification Marking)

製 番	適合ケーブル
PCS-XE () M	#28AWG (7/0.127) #30AWG (1/0.254) バラ線用 外被径 $\phi 0.8 \sim 1.0$ mm
PCS-XE () MA	#28AWG (7/0.127) #30AWG (1/0.254) バラ線用 外被径 $\phi 0.5 \sim 0.65$ mm
PCS-XE () MB	#30AWG (7/0.1) バラ線用 外被径 $\phi 0.5 \sim 0.65$ mm
PCS-XE () MC	#28AWG (7/0.127) #30AWG (1/0.254) フラットケーブル用 t=1mm以下
PCS-XE () ME	#30AWG (7/0.1) フラットケーブル用 t=1mm以下
PCS-XE () MJ	#28AWG (7/0.127) #30AWG (1/0.254) バラ線用 外被径 $\phi 0.65 \sim 0.8$ mm
PCS-XE () MK	#30AWG (7/0.1) バラ線用 外被径 $\phi 0.65 \sim 0.8$ mm
PCS-XE () MQ	#30AWG (7/0.1) バラ線用 外被径 $\phi 0.8 \sim 1.0$ mm

PCS-XE100M ()	100	72.45	$1.27 \times (50-1) = 62.23$	66.60	72.40	1, 50, 51, 100
PCS-XE68M ()	68	52.13	$1.27 \times (34-1) = 41.91$	46.28	52.10	1, 34, 35, 68
PCS-XE50M ()	50	40.70	$1.27 \times (25-1) = 30.48$	34.85	40.70	1, 25, 26, 50
PCS-XE26M ()	26	25.46	$1.27 \times (13-1) = 15.24$	19.61	25.46	1, 13, 14, 26
製 番	芯数	A	B	C	D	端子番号表示
		寸 法				

		5	ケーブルカバー	PBT (GF)	2	——	UL94V-0 (黒)
		4	スペーサー	PBT (GF)	2	——	UL94V-0 (黒)
③		3	シェル	鋼	1	Niめっき	——
②		2	絶縁体	PBT (GF)	1	——	UL94V-0 (黒)
①	970328	横田	製番追加	1	ピンコンタクト	りん青銅	芯数 注1. 参照

改版 LTR.	年月日 DATE	変更者 BY	変更内容 REV. DESCRIPT	番 号 No.	部 品 名 称 PART NAME	材 質 MATERIAL	個 数 QTY	処 理 FINISH	備 考 NOTE
年 月 日 DATE 6.6.6 (1994)		尺 度 SCALE 2/1		単 位 UNIT mm (INCH)	3 角 法 3RD. A. P	本 多 通 信 工 業 株 式 会 社 HONDA TSUSHIN KOGYO CO., LTD.			
製 図 DR.	設 計 DE.	検 査 CHK.	検 査 CHK.	承 認 APP.	名 称 NAME	PCS-XEタイプ雄コネクタ (SCSI-Ⅱ, Ⅲ用)			
横田	横田	佐藤	平井	宮崎	製 番 PART NO.	PCS-XE () M ()			